

800 SERIES

STANLEY®
FLOORING





WEAR RESISTANCE

Durable Supreme Guard UV Coating protects against daily scratches and keeps floors looking newer for longer.



WATERPROOF


100% waterproof core and surface resist spills and moisture for worry-free living.



ACOUSTIC SHIELD

Built-in sound absorption reduces footstep noise and creates a quieter, more comfortable home.

Five layers. One reliable floor.

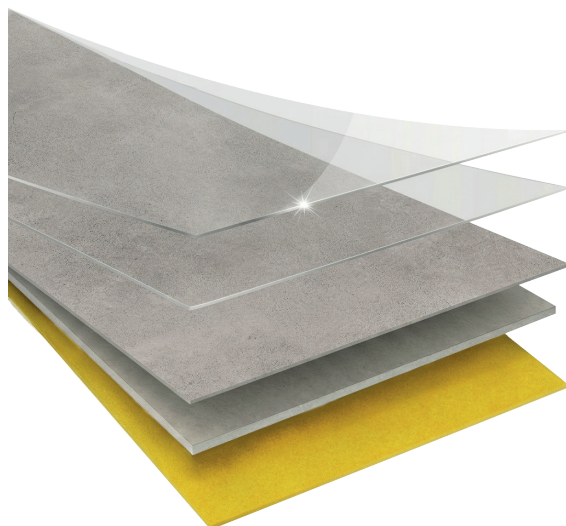

SUPREME GUARD UV COATING

WEAR-RESISTANT LAYER

DECORATIVE STONE FILM

SPC CORE (STONE PLASTIC COMPOSITE)

HIGH-DENSITY IXPE UNDERLAY

TOTAL BUILD UP **6,5 mm**

TECHNICAL SPECIFICATIONS

Wear Layer	0,50 mm
Total Thickness	5 + 1,5 mm
Plank Size	400 x 800 mm
Installation	i4F Drop-Lock Technology
Water Resistance	100% Waterproof
Surface Treatment	Supreme Guard UV Coating
Acoustic Performance	$\Delta L_w = 20$ dB
Underfloor Heating	Yes · max 27°C
Use Class (EN)	23 – 34
Warranty	Residential 25 yr Commercial 10 yr

CERTIFICATIONS & STANDARDS



EN 14041:2004/AC2006



9001:2015
14001:2015
45001:2018



Phthalate Free



SCAN THE QR CODE FOR
INSTALLATION &
USER GUIDES

800 SERIES

A refined concrete palette — four mineral tones from soft Ivory to deep Taupe, for calm, contemporary interiors.



**IVORY
CONCRETE**

ST825



**CAPPUCCINO
CONCRETE**

ST826



**ASH
CONCRETE**

ST827



**TAUPE
CONCRETE**

ST828



800 SERIES

IVORY CONCRETE

ST825

TOTAL THICKNESS

5 + 1,5 mm

TILE SIZE

400 × 800 mm

WEAR LAYER

0,50 mm

SURFACE TEXTURE

Coralline



Powered by Click4U® and 3L TripleLock®
PRODUCED UNDER LICENSE OF THE PATENTS LISTED @www.4F.com/patents



800 SERIES

CAPPUCCINO CONCRETE

ST826

TOTAL THICKNESS

5 + 1,5 mm

TILE SIZE

400 × 800 mm

WEAR LAYER

0,50 mm

SURFACE TEXTURE

Coralline



Powered by Click4U® and 3L TripleLock®
PRODUCED UNDER LICENSE OF THE PATENTS LISTED @www.4F.com/patents



800 SERIES

ASH CONCRETE

ST827

TOTAL THICKNESS

5 + 1,5 mm

TILE SIZE

400 × 800 mm

WEAR LAYER

0,50 mm

SURFACE TEXTURE

Coralline



Powered by ClickUP® and 3L TripleLock®
PRODUCED UNDER LICENSE OF THE PATENTS LISTED @www.dl.com/patents



800 SERIES

TAUPE CONCRETE

ST828

TOTAL THICKNESS

5 + 1,5 mm

TILE SIZE

400 × 800 mm

WEAR LAYER

0,50 mm

SURFACE TEXTURE

Coralline



Powered by ClickUP® and 3L TripleLock®
PRODUCED UNDER LICENSE OF THE PATENTS LISTED @www.dl.com/patents

STANLEY® FLOORING

PACKAGING & PALLET INFORMATION

PACKAGE

1,92 m²

6 pieces / box

20,08 kg

PALLET

74,88 m²

39 boxes

823 kg

STANLEY® and the STANLEY logo are registered trademarks of Stanley Black & Decker Inc.
All rights reserved.

Imported and distributed by Area Floors · Kiezel Kleine Brogel 57, 3990 Peer, Belgium
www.areafloors.com.tr ·
For customer services please contact: 2helpu.com